

SLA 5/24

Slave module for Glamox Heating H40/H60
Regulated by control-signal 5-24 Volt DC/AC

Glamox® Heating

TECHNOLOGY AND DESIGN COMING TOGETHER

SLA 5/24 for external control

SLA 5/24 can be regulated by all systems that sends a control signal between 5-24V DC/AC. When voltage is applied (5-24V), the heater will turn on, and stay on as long as voltage is applied.



SLA 5/24 Slave module

- Slave module turns heater on and off by control-signal from external thermostat.
- Synchronized start of heaters gives even heat distribution in the room.

Specifications:

- Master input for 5-24 Volt DC/AC.
- Control-signals are optically isolated from main voltage.

Regulating the room-temperature by controlling heat and cooling in sequence is used in many applications.

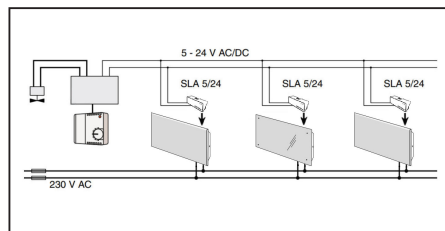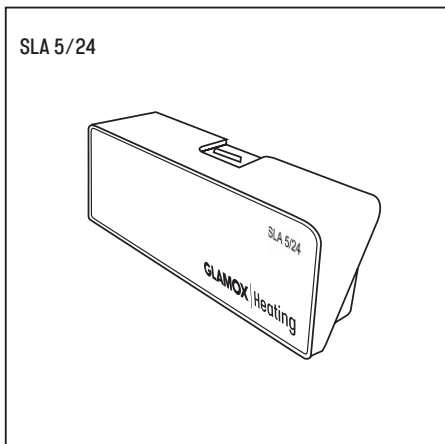

SLA 5/24

SLA5/24 H40/H60 white 230V-400V

SLA5/24 H40/H60 black 230V-400V

Art.nr..

911083

911084

Produced by Adax AS. Adax orders office: Tel.: +47 33 77 17 55. Service: Tel.: +47 33 77 17 50
Postal address. PO Box 38, N-3061 Svelvik, Norway. www.glamoxheating.com