

# SLA 5/24

Slavemodul for Glamox Heating ovner serie 3001  
Reguleres med styresignal fra 5-24 Volt DC/AC

**Glamox® Heating**

TECHNOLOGY AND DESIGN COMING TOGETHER

## OBS!

Sørg for at produktet er koblet fra den elektriske krets før du bytter ut termostaten.

### SLA 5/24 for reguleing fra ekstern styring.

SLA 5/24 kan styres av alle system med styresignaler fra 5-24 Volt DC/AC. Når spenning tilføres vil SLA 5/24 koble ovnens varme-element på, og varme tilføres i den tid signalspenning tilføres.



### SLA 5/24 slavemodul.

- Slavemodul kobler ovnen inn og ut i takt med termostat. (Ekstern styring)
- Synkron innkobling av ovnen gir jevn varmedeling i rommet.

### Spesifikasjoner:

- Masterinngang for 5-24 Volt DC/AC
- Galvanisk skille mot nettspenning (optokobler).

Regulering av romtemperaturen ved styring av varme og kjøling i sekvens benyttes i en rekke system.

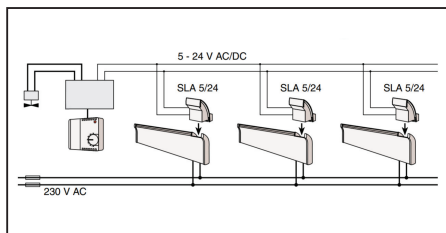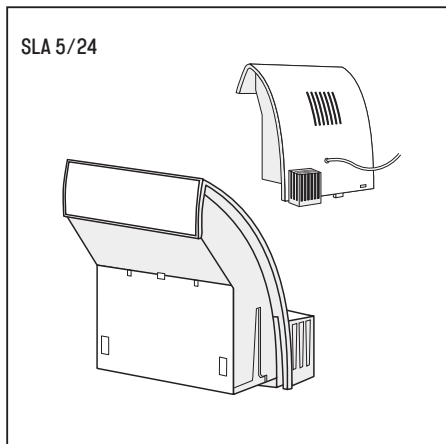

SLA 5/24  
SLA 5/24 (230V)

Art.nr.  
755 222 432

EL.nr.  
54 284 61

# SLA 5/24

Slave module for Glamox Heating serie 3001  
Regulated by control-signal 5-24 Volt DC/AC

**Glamox® Heating**

TECHNOLOGY AND DESIGN COMING TOGETHER

## ATTENTION!

Make sure that product is disconnected from electrical circuit before replacing the thermostat.

### SLA 5/24 for external control


SLA 5/24 can be regulated by all systems that sends a control signal between 5-24V DC/AC.  
When voltage is applied (5-24V), the heater will turn on, and stay on as long as voltage is applied.

### SLA 5/24 Slave module


- Slave module turns heater on and off by control-signal from external thermostat.
- Synchronized start of heaters gives even heat distribution in the room.

### Specifications:

- Master input for 5-24 Volt DC/AC.
- Control-signals are optically isolated from main voltage.

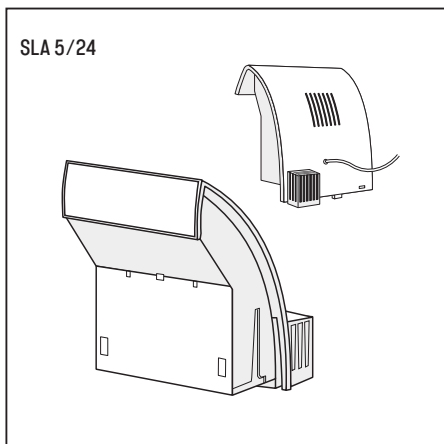

Regulating the room-temperature by controlling heat and cooling in sequence is used in many applications.

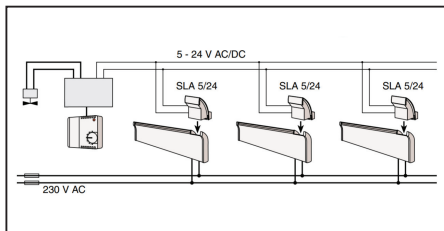

SLA 5/24  
SLA 5/24 (230V)

Art.nr.  
755 222 432

EL.nr.  
54 284 61